

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 018 854 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
12.07.2000 Bulletin 2000/28

(51) Int Cl.7: **H04R 25/00**, G10L 21/02,  
H04R 3/00

(21) Application number: **99610002.0**

(22) Date of filing: **05.01.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**


(71) Applicant: **OTICON A/S**  
**2900 Hellerup (DK)**

(72) Inventor: **Hansen, Kim Vejlbj**  
**2900 Hellerup (DK)**

(54) **A method and a device for providing improved speech intelligibility**

(57) The invention relates to a method for reduction of noise in an audio signal containing noise and a target signal, the method comprising, providing at least two input signals; processing the input signals by means of an independent component analysis, hereby determining

statistical dependencies of signal elements of the two input signals and determining whether statistical dependent signal elements form part of the target signal; outputting a part of the audio signal. The invention further relates to a device for use in reducing noise in an audio signal containing noise and a target signal.

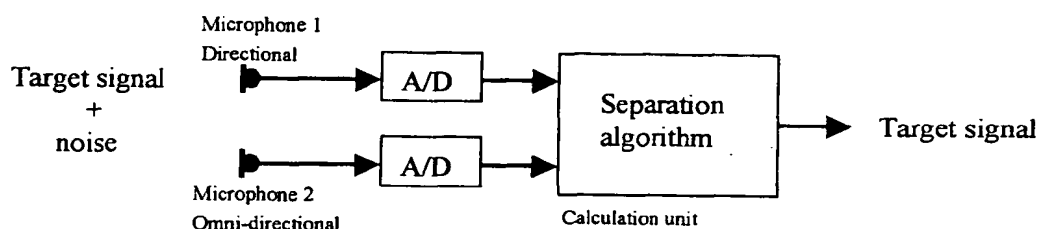

**FIG. 2**

**EP 1 018 854 A1**

## Description

### BACKGROUND OF THE INVENTION

**[0001]** The invention relates to a method for the reduction or elimination of an eventual noise contribution to an audio signal, which is picked up by sensor means. The invention further relates to a device for reduction or elimination of an eventual noise contribution to an audio signal, which is picked up by sensor means.

**[0002]** The invention will for practical reasons be explained in connection with a hearing aid. The invention is however not limited to this field as it may be implemented in other technical fields where an audio signal is picked up by sensor means.

**[0003]** Although modern hearing aids have come a long way in providing amplification well suited to the hearing impaired user, many hearing impaired people still have problems understanding speech in noise. The issue of improving the speech intelligibility by improving the ratio between the desired speech signal and the noise has already been addressed in many ways, mostly based on directionality.

**[0004]** As of the present day the commercially available directional devices are either an acoustical two-port design as disclosed in US patent no. 5524056, an electrical combination of the outputs of two omni-directional microphones as disclosed in J. Malsano & W. Hottinger, "A method for electronically beam forming acoustical signals and acoustical sensorapparatus", European Patent EP 0 820 210 A2, or an electrical combination of several microphones into a single highly directional device to be used physically externally to the hearing aid as disclosed in W. Soede, A.J. Berkhout & F.A. Bilsen, 1993, "Development of a directional hearing instrument based on array technology", J. Acoust. Soc. Am. 94(2), p. 785-798.

**[0005]** These previously known devices are thus characterised by a certain amount of directionality pointing in the forward direction with respect to the user, and characterised by a time-invariant processing of the individual ingoing sensor signals. Although the use of directionality to some extent gives improved speech intelligibility, the directionality is in many situations non-satisfactory and there is a requirement of further improving speech intelligibility.

**[0006]** Directionality is also used in a different group of proposed devices, which make use of adaptive noise cancelling principles as disclosed in B. Widrow, J. Glover, J. McCool, J. Kaunitz, C. Williams, R. Hern, J. Zeidler, E. Dong & R. Goodlin, 1975, "Adaptive noise cancelling: Principles and applications", IEEE Proceedings 63, p. 1692-1716. Thus, a number of microphones, which may be mounted either in hearing aids at each ear of the user, on a headband or in a single hearing aid shell, are combined to form estimates of the interfering noise from which the target signal is removed. A signal containing as much target signal as possible is also formed, and

these signals are then used as inputs to an adaptive noise canceller. These devices work on the assumption that the target speech signal impinges from a certain predetermined direction, and are characterised by a directionality and a processing of the individual ingoing sensor signals, which is adaptively varying with time. Further, these devices are characterised by the use of the adaptive noise canceller, as disclosed in P.M. Zurek, J.E. Greenberg & P.M. Peterson, 1990, "Adaptive beamforming for noise reduction". United States Patent 4,956,867; P.V.F. Clough & N.A. Lobo, European Patent 0084892; and J. Vanden Berghe & J. Wouters, 1998, "An adaptive noise canceller for hearing aids using two nearby microphones", J. Acoust. Soc. Am. 103(6), p. 3621-3626.

**[0007]** Although the use of adaptive noise cancelling based on directionality to some extent gives improved speech intelligibility, the directionality is in many situations non-satisfactory in this respect, as it is the case in connection with the use of directionality alone.

**[0008]** Recently, several researchers have published a new principle, which is called independent component analysis (ICA):

1. J. Herault & C. Jutten, "Space or Time adaptive signal processing by neural network models", Neural Networks for Computing, AIP Conference Proceedings 151, Snowbird, Utah, pp. 207-211, 1986.
2. A.J. Bell, United States Patent 5,706,402.
3. A.J. Bell & T.J. Sejnowski, "An information-maximisation approach to blind separation and blind deconvolution", Technical Report no. INC-9501, February 1995, Institute for Neural Computation, UCSD, San Diego, CA 92093-0523.
4. T.W. Lee, M. Girolami, A.J. Bell & T.J. Sejnowski, "A unifying information-theoretic framework for independent component analysis", Computers & Mathematics with applications, 1998 in press.
5. T.W. Lee, A.J. Bell & R. Orglmeister, "Blind source separation of real world signals", Proceedings ICNN, USA, 1997.
6. T.W. Lee, A.J. Bell & R. H. Lambert, "Blind separation of delayed and convolved sources", Advances in Neural Information Processing Systems 9, 1997 MIT Press, Cambridge MA pp. 758-764.
7. P. Smaragdakis, 1997, "Efficient blind separation of convolved sound mixtures", IEEE Workshop on Applications of Signal Processing to Audio and Acoustics, Mohonk Mountain House, New Paltz, New York.
8. K. Torkkola, "Blind separation of delayed sources based on information maximization", Proceedings of the IEEE international conference on acoustic, speech and signal processing, May 7-10 1996, GA, USA.
9. K. Torkkola, "Blind separation of convolved sources based on information maximization", IEEE workshop on neural network for signal processing, Kyo-

to, Japan, Sept 4-6, 1996.

10. J.F. Cardoso, "Equivariant adaptive source separation", IEEE Transactions on Signal Processing 44(12), 1996.

11. S. Amari, A. Cichocki, H. H. Yang, "A new learning algorithm for blind signal separation", Advances in neural information processing systems 8. MIT Press, 1996.

[0009] The objective of ICA is to recover the underlying independent source signals given only sensor observations that are linear mixtures of the original source signals. The only assumption of ICA is that the original source signals are statistically independent, otherwise the statistics of the source signals and the mixing of these into the sensor signals may be unknown. In contrast to correlation-based transformations such as Principal Component Analysis (PCA, I.T. Jolliffe, Principal Component Analysis, 1986, Springer Verlag), which decorrelates signals according to 2<sup>nd</sup>-order statistics, ICA also reduces higher-order statistical dependencies, in terms of maximising joint output entropy, in order to extract statistically independent signal components.

[0010] In the linear blind signal separation problem,  $N$  signals,

$$\mathbf{s}(t) = [s_1(t), \dots, s_N(t)]^T,$$

are mixed so that an array of  $N$  sensors picks up a set of signals

$$\mathbf{x}(t) = [x_1(t), \dots, x_N(t)]^T,$$

each of which has been mixed, delayed and filtered as follows

$$x_i(t) = \sum_{j=1}^N \sum_{k=0}^{M-1} a_{ijk} s_j(t - D_{ij} - k)$$

where  $D_{ij}$  are entries in a matrix of delays and  $a_{ij}$  are the  $M$ -tap filter coefficients between the  $j$ th source and the  $i$ th sensor. The problem is to invert this scrambling without knowledge of it, thus recovering the original signals  $\mathbf{s}(t)$  given only the  $\mathbf{x}(t)$  signals. Finding this inverse scrambling is a challenging task since no informations are provided about the mixing nor the signals (hence the term blind separation). The type of architecture chosen for inverting the scrambling is important and can be made in numerous ways. An accurate architecture for inverting a  $M$ -tap filter is an infinite impulse response (IIR) filter with  $M$  coefficients. However, IIR filters are limited to have poles inside the unit circle, which imply that

a stable filter only exists for a minimum phase system. FIR filters may be used to approximate the inverse solution. Thus the inverse scrambling is performed according to

$$u_i(t) = \sum_{j=1}^N \sum_{k=0}^{M-1} w_{ijk} x_j(t - d_{ij} - k)$$

which has filters,  $w_{ij}$ , and delays  $d_{ij}$ , which supposedly reproduce, at the output  $\mathbf{u}(t)$ , the original uncorrupted source signals,  $\mathbf{s}(t)$ , apart from a scaling factor for each signal and a permutation of signals.

[0011] Several algorithms have been proposed for the blind separation of linear mixtures. Bell and Sejnowski (3) proposed to learn the separating process by minimising the mutual information between components of  $\mathbf{y}(t) = g(\mathbf{u}(t))$ , where  $g$  is a non-linear function approximating the cumulative probability density function of the sources. They showed that for positively kurtotic signals (like speech) minimising the mutual information between components of  $\mathbf{y}(t)$  is equal to maximising the entropy of  $\mathbf{y}(t)$ , which can be written as

$$H(\mathbf{y}) = -E[\ln(f_y(\mathbf{y}))],$$

where  $f_y(\mathbf{y})$  denotes the probability density function of  $\mathbf{y}(t)$ . Denoting the determinant of the Jacobian of the whole unmixing process by  $|J|$ ,  $f_y(\mathbf{y})$  can be written as  $f_x(\mathbf{x})/|J|$  (the Jacobian is a matrix with entries of  $\partial y/\partial x_i$ ). Maximising the entropy of the output leads to maximising

$$E[\ln(|J|)],$$

which in turn can be developed into a stochastic gradient ascent rule using instances of  $\mathbf{x}(t)$  and  $\mathbf{y}(t)$ , instead of using the expectation. Thus

$$\Delta \mathbf{W} \propto (1 - 2y(t))\mathbf{x}(t)^T + [\mathbf{W}^T]^T$$

where  $g(u) = 1/(1 + e^{-u})$  is used to approximate the cdf.

[0012] The algorithm can be made more efficient and independent of the conditioning of the mixing process (matrix) by using the so-called natural gradient instead of the absolute gradient, see Amari (11).

[0013] One particular proposed application of ICA is within electroencephalographic (EEG) recording of scalp potentials in humans and related brain activity

measurements.

**[0014]** The application of the ICA to hearing aids has also been mentioned in H. Sahlin, "Blind signal separation by second order statistics", Ph.D. thesis, Chalmers University of Technology, Technical Report no. 345, Sweden, 1998, but it has so far never been suggested how the implementation of this technique could be realised in connection with audio systems in order to improve speech intelligibility.

**[0015]** Based on this prior art the objective of the present invention is to provide a method and a device for reducing noise in an audio signal comprising both noise and target signal, which method and device has an increased functionality and reliability compared with the prior art within the audio field of technology.

#### SUMMARY OF THE INVENTION

**[0016]** This is achieved by means of a method comprising the steps of:

providing at least two input signals, each having different contents of target signal and noise;  
processing the two input signals;  
the processing comprising use of an independent component analysis or a similar technique based on the differences of the at least two input signals, hereby determining whether statistical dependent signal elements are present and removing at least part of unwanted signal elements;  
outputting a part of the audio signal.

**[0017]** The target signal is defined as the signal coming from in front of the device performing the method, whereas other signals are considered as noise signals. In case of no specific well-defined source signal and cases laying outside the assumed set-up, the noise elimination will disappear meaning that the signal processing strategy will pass the input signals unaltered to the outputs.

**[0018]** In a preferred embodiment the method comprises at least two input signals, which are picked up at least at two mutually distanced locations. Hereby one signal contains the target signal with a higher signal-to-noise ratio than the other input signal. In this case the sensor may be identical.

**[0019]** In a further preferred embodiment the method comprises at least two input signals, which are based on differences in the directionality, preferably a directional and an omni-directional sensor. Hereby it becomes possible to determine the origin of the respective signal components based on the differences of the directionality applied when sensing the two input signals.

**[0020]** The different embodiments show that the differences in signal-to-noise ratio is based on the actual situation of use, which means that it is the mutual differences in signal-to-noise ratio in relation to a desired target signal, which is relevant, and not the signal-to-noise

ratio of the sensor means itself.

**[0021]** In a further preferred embodiment two or more output signals are produced and where a possibility exists for switching between the two or more output signals or combinations of these. Alternatively an automatic switching between the two or more output signals according to a predetermined scheme is provided. Hereby it becomes possible to make a choice of the actual influence of the separation method on the noise canceling in the actual situation or at least have a change according to the actual choice of the predetermined scheme, which may be adapted for switching at different listening environments.

**[0022]** The objective of the invention is further achieved by means of a device comprising:

at least two input channels;  
signal processing means in connection with the input channels, which provides input signals to the signal processing means;  
a receiver in connection with the signal processing means;  
the signal processing means being adapted to process the signals by means of an independent component analysis method or a similar method based on differences of signal-to-noise ratios of the input signals in relation to a desired target signal, the processing comprising determining whether statistical dependent signal elements are present and removing at least part of the unwanted signal elements, thereby enhancing other parts of the audio signal.

**[0023]** In a preferred embodiment the device comprises two sensors, preferably microphones, having different signal-to-noise ratio (S/N-ratio). One of the sensors is chosen as the target sensor. Hereby it becomes possible to separate the respective signal components based on the noise content of the further sensor.

**[0024]** In a preferred embodiment the device comprises a directional microphone and an omni-directional microphone. Hereby the directional microphone will preferably contain the desired output signal based on the position of the user facing the desired audio signal source.

**[0025]** In a preferred embodiment the two microphones are mutually distanced. Hereby it becomes possible to determine the origin of the respective signal components based on a time delay in reception of the two input signals. This makes it possible to make a beamforming of the input signals hereby possibly adding directionality to at least one of the inputs. Other ways of beamforming may be used in this connection.

**[0026]** In a preferred embodiment two or more output signals are produced and means are provided for switching between the two or more output signals or combinations of these. Alternatively means are provided for automatic switching between the two or more out-

put signals according to a predetermined scheme.

**[0027]** Due to the fact that most hearing impaired have a hearing disorder which makes it even more difficult than for normal hearing persons to separate a target signal from the noise, which is often present in a speech situation, the invention is particularly relevant in connection with the technical field of hearing aids.

**[0028]** The invention therefor further relates to a hearing aid comprising: at least two microphones for audio signal input; signal processing means in connection with the microphones; an amplifier in connection with the signal processing means; a receiver in connection with the amplifier for outputting a signal from the amplifier; the signal processing means being adapted to process the signals by means of an independent component analysis method or a similar method based on the input from the at least two microphones, the processing comprising determining whether statistical dependent signal elements are present and removing at least part of the unwanted signal elements, thereby enhancing other parts of the audio signal.

**[0029]** The hearing aid according to the invention may further comprise the features set forth above, either separate or in combination.

**[0030]** Other fields of relevant use of the invention may be telecommunication or audio systems. In such systems the input and output may be connected to antennas or similar transmission and receiving means or may comprise microphones as input means as in the case of a hearing aid. Other elements of such systems may be standard elements, as these are not influenced by the signal processing according to the invention.

**[0031]** The invention will be described more detailed with reference to the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

### **[0032]**

- Fig. 1 is a diagram showing the principles of the invention;
- Fig. 2 is a schematic diagram showing the principles of an implemented version of the invention;
- Fig. 3 is a schematic diagram showing the principles of an implemented version of the invention;
- Fig. 4 is a schematic diagram showing the implemented version of the invention as shown in fig. 2 further implemented in a hearing aid.

## DESCRIPTION OF THE PREFERRED EMBODIMENT

**[0033]** The fundamental principle of the invention is schematically shown in fig. 1. The invention is basically a system, e.g. a hearing aid, with two or more sensors and a calculation unit. The calculation unit carries out the separation of the target and noise signals, by using the independence of the mixed signals according to ICA or a similar method comprising the basics of the ICA.

The sensors are arranged so that one is positioned to receive sound primarily from a target direction in front, whereas the others have arbitrary characteristics that do not specifically favour the target direction. Hereby, it is possible to use the technique of independent component analysis to separate the desired signal, which impinges from the target direction, from the disturbing noise signals, which impinge from any other directions.

**[0034]** To illustrate the invention, an example is given of a system implementing signal processing as described above. Fig. 2 schematically shows the signal processing system. The system comprises a directional and an omni-directional microphone, and a digital signal processing unit implementing the signal separation algorithm. Using the directional microphone gives the target direction from in front of the user, whereas the omni-directional microphone gives a signal equally representing all signals around the head of the user.

**[0035]** A particularly important property of the independent component analysis is that it separates convolved and delayed source signals, where each independent source signal is defined as a signal which appears in the same way within each mixing process. Another important characteristic about the independent component analysis is that knowledge about the ratio of the source signals within the mixed signals can be used for classifying the separated signals. If for instance one source signal appears with a significantly better signal to noise ratio in one of the sensor signals, this information can be used to ensure that this source signal always will appear in a fixed output. Within the present invention these two characteristics combined with an appropriate placement of at least two sensors are exploited to eliminate signals not coming from in front of the user of the device.

**[0036]** From fig. 3 an embodiment appears, which comprises the features of the embodiment of fig. 2, but where the signal processor produces two output signals. By means of switching means one of the two output signals may be selected for further processing, e.g. amplification, or for output.

**[0037]** From fig. 4 an embodiment appears as a hearing aid according to the invention. The essential components of the hearing aid comprise two microphones, preferably a directional microphone and an omni-directional microphone, and an A/D converter connected to each of the microphones. The A/D converters are connected to a digital signal processor, which is adapted to perform the ICA method on the incoming signals. The signal from the signal processor is then lead to an amplifier and from this through a D/A converter to a receiver for performing the output of the processed signal. The devices of the figs. is in a usual manner powered by means of usual power sources, such as batteries.

**Claims**

1. A method for reduction of noise in an audio signal containing noise and a target signal, the method comprising:
 

providing at least two input signals, each having different contents of the target signal and the noise, hereby providing different input signals; processing the input signals by means of an independent component analysis based on the differences of the content of the at least two input signals, hereby determining whether statistical dependent signal elements are present and removing at least part of the unwanted signal elements; outputting a part of the audio signal.
2. A method according to claim 1, wherein the at least two input signals are picked up at least at two mutually distanced locations;
3. A method according to claim 1 or 2, wherein two or more output signals are produced and where a possibility exists for switching between the two or more output signals or combinations of these.
4. A method according to any of the claims 1-3, wherein two or more output signals are produced and where an automatic switching between the two or more output signals according to a predetermined scheme is provided.
5. A device for use in reducing noise in an audio signal containing noise and a target signal, the device comprising:
 

at least two input channels; signal processing means in connection with the input channels, which provides input signals to the signal processing means; a receiver in connection with the signal processing means; the signal processing means being adapted to process the signals by means of an independent component analysis method based on differences of signal-to-noise ratios of the inputs signals in relation to a desired target signal, the processing comprising determining whether statistical dependent signal elements are present and removing at least part of the unwanted signal elements, thereby enhancing other parts of the audio signal.
6. A device according to claim 5, wherein the device comprises at least two microphones having a mutually different signal-to-noise ratio in relation to a desired target signal, hereby being able to provide different input signals for the respective input channels.
7. A device according to claim 5 or 6, wherein the device comprises at least a directional microphone and an omni-directional microphone.
8. A device according to claim 5, 6 or 7, wherein two or more output signals are produced and where means are provided for switching between the two or more output signals or combinations of these.
9. A method according to claim 5, 6 or 7, wherein two or more output signals are produced and where automatic switching means are provided for switching between the two or more output signals according to a predetermined scheme.
10. A hearing aid comprising at least two microphones each having a different signal-to-noise ratio in relation to a desired target signal; signal processing means in connection with the at least two microphones; an amplifier in connection with the signal processing means; a receiver in connection with the amplifier for outputting a signal from the amplifier; the signal processing means being adapted to process the signals by means of an independent component analysis method based on the input from the two microphones having a mutually different signal-to-noise ratio in relation to a desired target signal, the processing comprising determining whether statistical dependent signal elements are present and removing at least part of the unwanted signal elements, thereby enhancing other parts of the audio signal.
11. A hearing aid according to claim 12, wherein the hearing aid comprises a directional microphone and an omni-directional microphone.

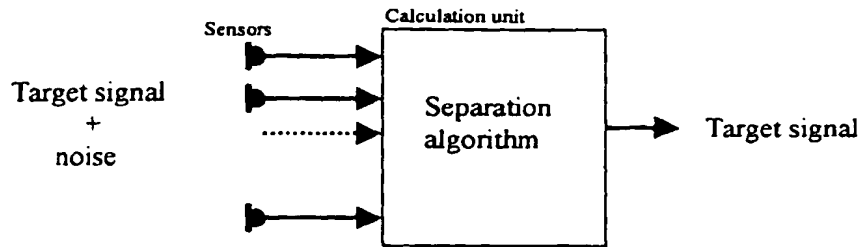


FIG. 1

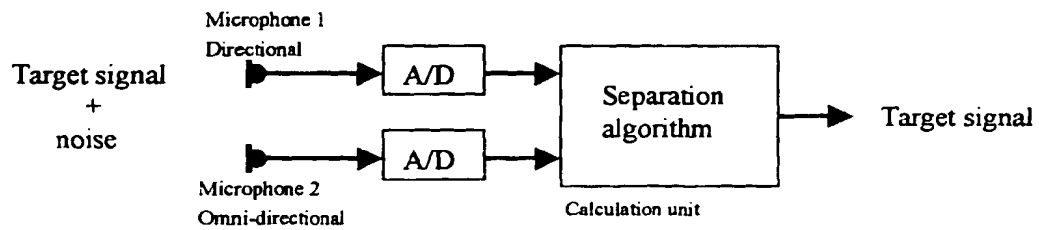


FIG. 2

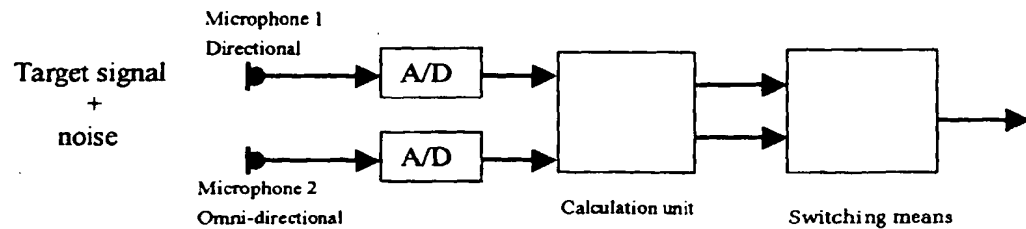


FIG. 3

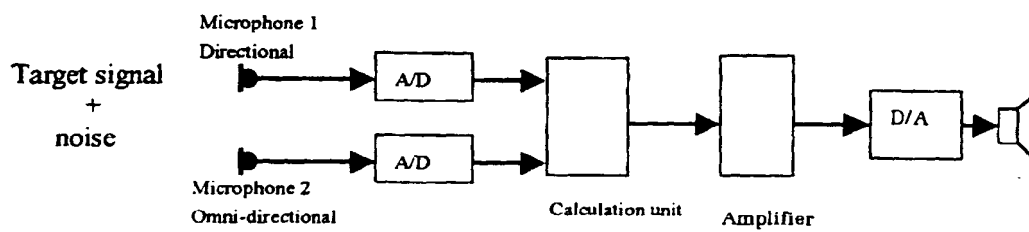


FIG. 4





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 61 0002

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION
X	WO 98 25214 A (ZIEHE ANDREAS ;GMD FORSCHUNGSZENTRUM INFORMAT (DE); MUELLER KLAUS) 11 June 1998 (1998-06-11)	1	H04R25/00 G10L21/02 H04R3/00
Y	* page 2, line 4 - page 10, line 15 * * page 29, line 6 - line 10 *	10	
Y	US 5 524 056 A (KILLION MEAD ET AL) 4 June 1996 (1996-06-04)	10	
A	* column 3, line 37 - line 49; figures *  * column 8, line 16 - column 9, line 30 *	1-3,6-9, 11	
X	DE 195 31 388 C (EHLERS FRANK ;SCHUSTER HEINZ GEORG PROF DR (DE)) 25 July 1996 (1996-07-25) * page 8, line 5 - line 11 *	1,5	
A	US 5 208 786 A (FEDER MEIR ET AL) 4 May 1993 (1993-05-04) * column 1, line 60 - column 3, line 51; figures *	1,5	
A	EP 0 565 479 A (UNIV RAMOT) 13 October 1993 (1993-10-13) * page 4, line 58 - page 5, line 51 *	1,5	TECHNICAL FIELDS SEARCHED  G10L H04R
A	TANIGUCHI T ET AL: "Blind signal separation for recognizing overlapped speech" J. ACOUST. SOC. JPN. (E) (JAPAN), JOURNAL OF THE ACOUSTICAL SOCIETY OF JAPAN (E), NOV. 1998, ACOUST. SOC. JAPAN, JAPAN, vol. 19, no. 6, pages 385-390, XP002108812 ISSN: 0388-2861 * abstract *	1,5	
		-/--	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>12 July 1999</b>	Examiner <b>Gastaldi, G</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPD FORM 1503 03.92 (P04001)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 61 0002

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION
A,D	US 5 706 402 A (BELL ANTHONY J) 6 January 1998 (1998-01-06) * column 1, line 15 - column 8, line 39 *	1,5	
			TECHNICAL FIELDS SEARCHED
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>12 July 1999</b>	Examiner <b>Gastaldi, G</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (PM/CI)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 61 0002

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-07-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9825214	A	11-06-1998	DE	19652336 A	04-06-1998
US 5524056	A	04-06-1996	EP	0664071 A	26-07-1995
			WO	9424834 A	27-10-1994
DE 19531388	C	25-07-1996	NONE		
US 5208786	A	04-05-1993	IL	102738 A	04-08-1996
			WO	9305503 A	18-03-1993
EP 0565479	A	13-10-1993	IL	101556 A	04-08-1996
			JP	6021838 A	28-01-1994
			US	5539832 A	23-07-1996
US 5706402	A	06-01-1998	AU	4596596 A	19-06-1996
			WO	9617309 A	06-06-1996

EPO FORM P055

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**